


# WISELIVING Full system Evacuated Tube Solar System

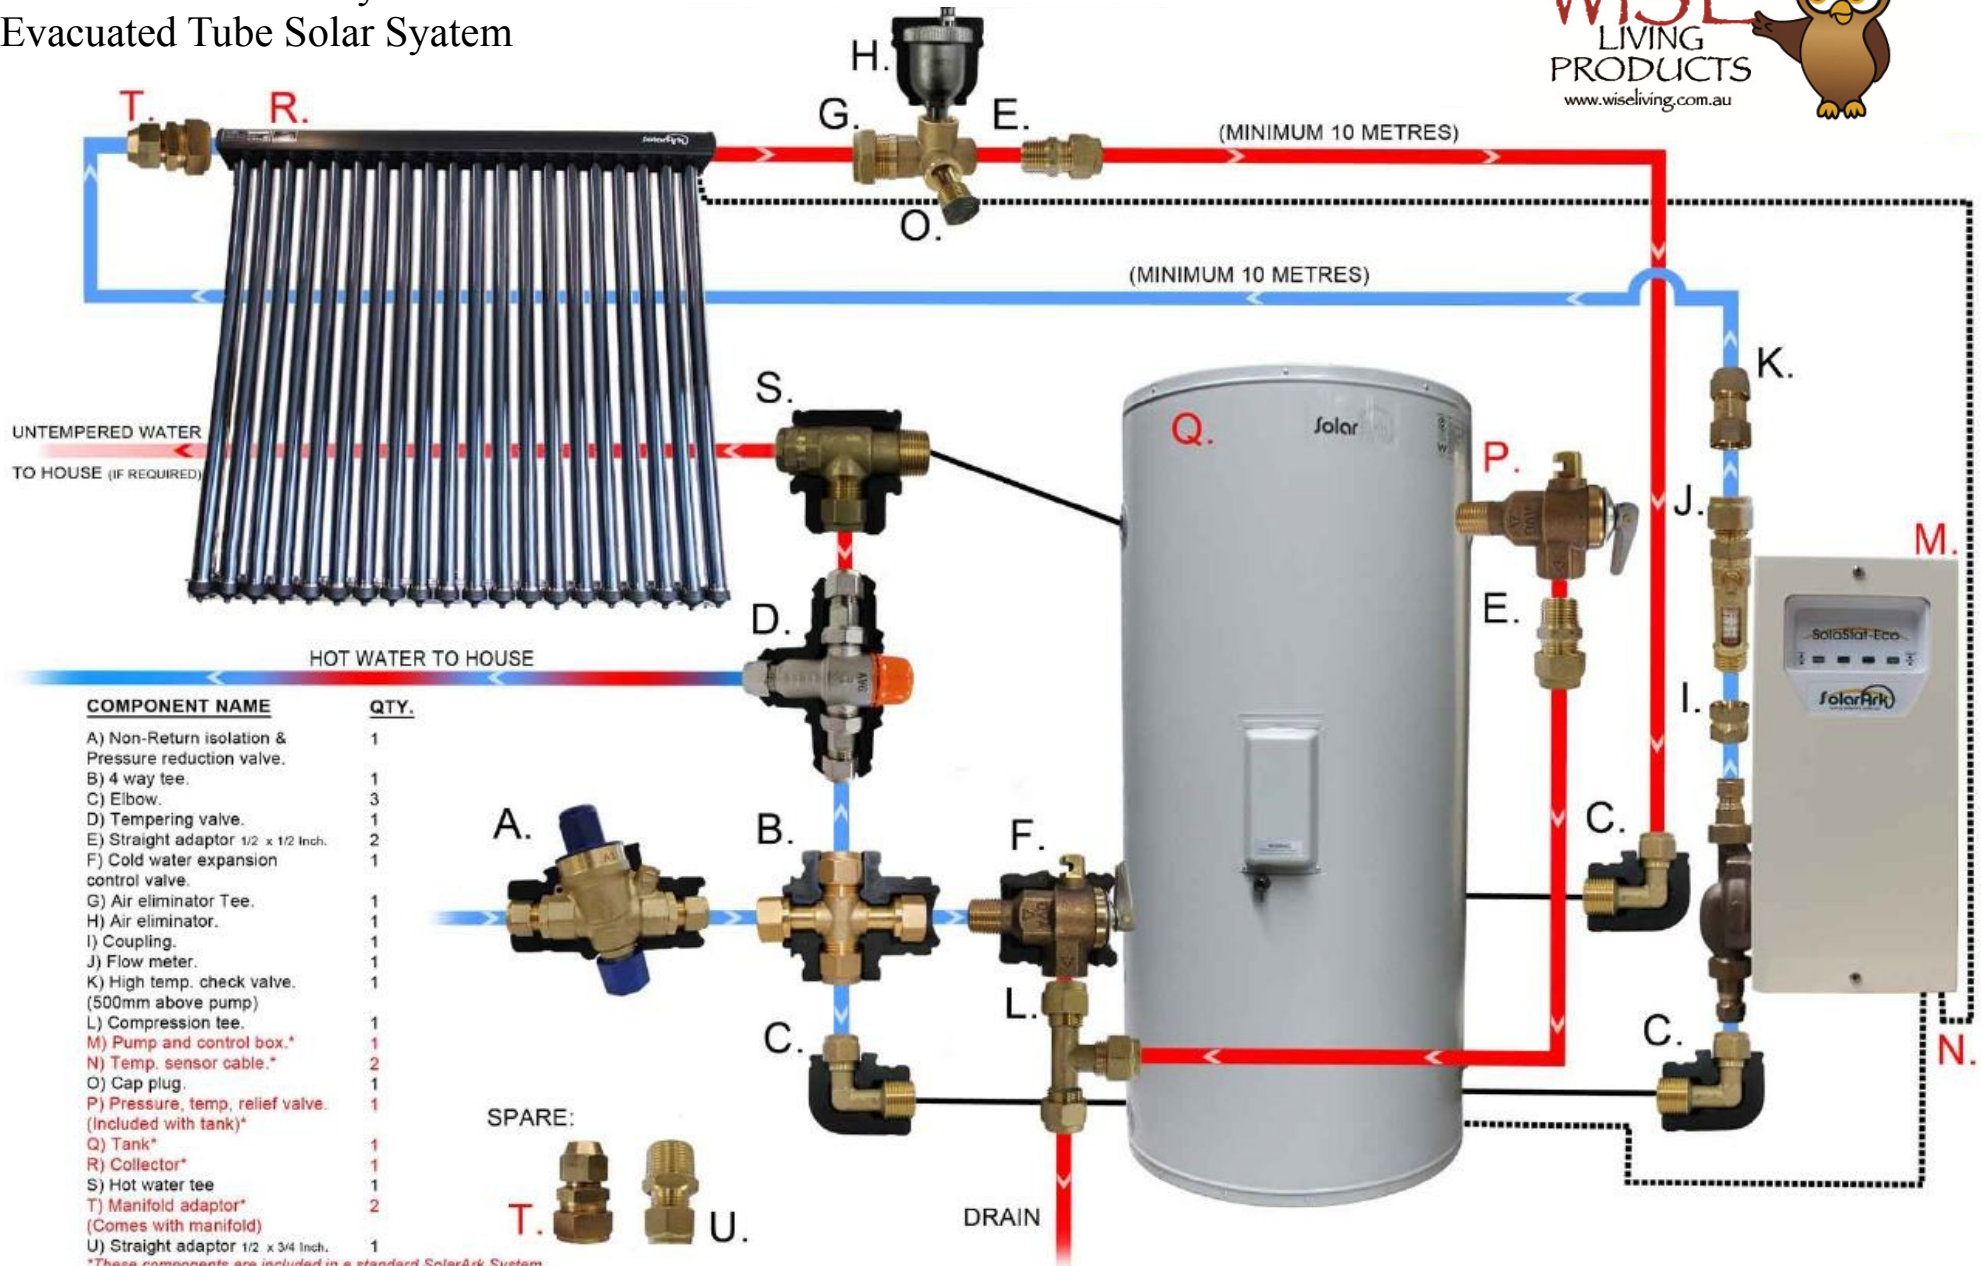

UNTEMPERED WATER  
TO HOUSE (IF REQUIRED)

HOT WATER TO HOUSE

**COMPONENT NAME**      **QTY.**

- A) Non-Return isolation & Pressure reduction valve.      1
- B) 4 way tee.      1
- C) Elbow.      3
- D) Tempering valve.      1
- E) Straight adaptor 1/2 x 1/2 Inch.      2
- F) Cold water expansion control valve.      1
- G) Air eliminator Tee.      1
- H) Air eliminator.      1
- I) Coupling.      1
- J) Flow meter.      1
- K) High temp. check valve. (500mm above pump)      1
- L) Compression tee.      1
- M) Pump and control box.\*      1
- N) Temp. sensor cable.\*      2
- O) Cap plug.      1
- P) Pressure, temp, relief valve. (Included with tank)\*      1
- Q) Tank\*      1
- R) Collector\*      1
- S) Hot water tee      1
- T) Manifold adaptor\* (Comes with manifold)      2
- U) Straight adaptor 1/2 x 3/4 Inch.      1

SPARE:



DRAIN

\*These components are included in a standard SolarArk System.