

# Polymer Pump Well

## 250/450L PUMP WELL

Everhard's 250/450 Pump Well has been a robust and effective solution in many domestic and industrial applications for several years. Our new spherical design provides the symmetry that our customers have been looking for with a deeper invert that provides greater flexibility in a number of usage situations.

### Inlet Connections

The upper level inlet connection provides a capacity of 450 litres while lower level inlet offers a capacity of 250 litres. The Pump Well is supplied with these connection recesses closed and the chosen port can be cut using an appropriately sized hole-saw.

All of the inlet connections will accept standard DN100 uPVC DWV pipe with rubber joint rings, two of which are supplied with the Pump Well.

A connection recess in the side opposite the inlet is also moulded into the Pump Well and can be used for venting if required.

### Deeper Invert

A 600mm Polymer Riser is available for use in situations where the inlet to the Pump Well needs to be deeper to obtain sufficient fall from the wastewater source. The riser increases the depth of the Pump Well connections while keeping the access

and inspection covers above ground level, however, it does not increase the tank capacity.

### Easily Transported

The Polymer Pump Well's small footprint and low weight makes it economical to transport. Once on site, the Pump Well can be easily handled and manoeuvred without the need for machinery.

### Recyclable Material

Polyethylene can be fully recycled and reused for the production of high quality products.

### Standards Mark Licensed

The Everhard Polymer Pump Well has been tested to AS/NZS1546.1 and found to comply with the Australian/New Zealand standard for vessels such as Septic Tanks and Collection Wells for use in domestic and some other situations.


### Durable

Polyethylene guarantees a high durability against dents, cracks or breaks in the material. The lawn green lid is also UV stabilised for longer life.

### Warranty

Everhard Industries provides a 15 year manufacturers warranty on the polymer components and workmanship of the Pump Well.

- 250 or 450 litre inlet capacity
- Seamless rotomoulded body
- Spherical design for increased strength
- Rubber ring seal fittings provided
- Lightweight construction
- Anchorage pockets to resist uplift
- Risers available
- Small footprint for economical transportation
- Tested to AS/NZS1546.1

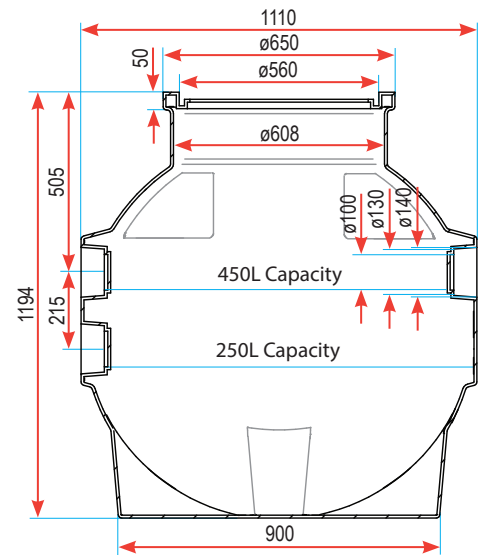

Product Code	Description	Installation	Cover	Capacity	Weight (Kg)
82200C	Polymer Pump Well	Above and Below Ground	Class A	250/450L	34.0
82221	Pump Well Riser 630 x 600mm				18.0

AUG16