

Tankmasta®

Because; not all tanks are created equal.

RAINWATER TANKS



Rotational
VISCOUNT
Mouldings

Viscount Rotational Mouldings Pty Ltd

81 Frankston Gardens Drive
Carrum Downs, Victoria, 3201, Australia.

Tel: (03) 8770 3200

Fax: (03) 8770 3204

Sales Enquiries: 1800 775 000

Email: vrmsales@viscount.com.au

Web Viscount: www.viscountroto.com.au

Tankmasta:



Note: All images in brochure shown with optional add on RIO filtration system.

Viscount Rotational Mouldings' (VRM) Tankmasta manufacture an extensive range of freestanding rainwater tanks. The tank range spans from the 1,000 Litre Modular Tanks, right through to 25,000 Litre Tanks.

Tankmasta Tank Features:

Tankmasta's ADP

Tankmasta's innovative Angle Dissemination Pivot (ADP) is a patented feature of all tanks above 15,000L. This simple but effective system acts like a keystone in an archway, overcoming the uncertainty and OH&S issues associated with internal centre poles.

Optional Add On - RIO Filtration System

Tankmasta's RIO filtration system is an optional extra. The RIO provides greater flexibility when installing your tank. Whether it is used on small catchment areas as a self-cleaning flow-through filter. Or in conjunction with the standard filter basket as a 200mm overflow on installations using multiple inlet pipes; the RIO system can be tailored to your individual needs.



Tankmasta's Dual Access Hatch - Flexibility

Tankmasta dual access hatch offers easy and convenient access to internally inspect or clean your tank. A standard feature on all Tankmasta above 5,2000L, the dual access hatch is perfect for installations using multiple inlet pipes in the plumbing when fitted with the optional add on, the RIO filtration system.

No Base Required

Tankmasta rainwater tanks save both time and money on installation; due to strong manufacturing integrity there is no need to prepare a concrete, crushed rock or sand base. Simply ensure that the tank site is flat and level, free from any rocks, stones or any other foreign matter that may damage the tank base.



Tank Range Specifications:

Code	Capacity (L)	Total Ht. (mm)	Inlet Ht. (mm)	Diameter (mm)
TA0010	1,000	2100	2100	830
TA0011	1,000	2100	2100	830
TA0020	2,000	2100	2100	1180
TA0030	3,000	2100	2100	1450
TA0050	5,000	2100	2100	1880
TA0052	5,200	1615	1600	2280
TA0075	7,500	2115	2100	2280
TA0100	10,000	2345	2300	2500
TA0102	10,200	1685	1600	3080
TA0150	15,000	2385	2300	3080
TA0200	20,000	2500	2300	3580
TA0250	25,000	2960	2760	3580

Tank Range:


Viscount Rotational Mouldings' (VRM) Tankmasta manufacture an extensive range of freestanding rainwater tanks. The tank range spans from the 1,000L Modular Tanks, with their ability for flexible capacity, right through to 25,000L.

Modulars

Modulars provide the perfect solution for when space is at a premium. The Modular can be installed in areas that cannot be accessed by regular tanks, even Slimline tanks. This is due to the Modular's on site assembly; each tank is brought in individually. Whether you want 1,000L or 20,000L, the diameter remains the same, just 830mm. Modulars are an easy and flexible solution.



Shown above: one Master (left) and two Slaves (right)




View of tank configuration.
Left: Master
Right: Slave

Features of Master

- 300mm basket filter
- 90mm high level overflow at 9 o'clock
- 40mm manifold outlet at 12 o'clock
- x2 25mm outlet 9 o'clock:
- First at 150mm up sidewall
- Second at 500mm up sidewall for bucket tap.

Tank Configuration:



- 12 Basket filter / Access hatch
Optional RIO filtration system
- 3 Outlet point
- 6 Outlet point
- Dual access hatch (7,500L & up)
- 9 Outlet point

Colour Range:

15% Surcharge applies to any non-standard colour.
Note: Colour swatches are to be used as a guide only due to the variations in the printing process.



Standard Round Tanks

2,000L - 5,200L




View of tank configuration for the 2,000L - 5,200L tanks.

Features

- 100mm standard overflow
- 300mm basket filter
- & access hatch at 12 o'clock
- 25mm outlet positioned to customers requirements

7,500L - 15,000L

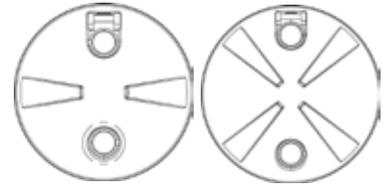


View of tank configuration.
Left: 7,500L - 10,000L
Right: 10,200L - 15,000L

Features

- 100mm standard overflow
- *300mm or **400mm basket filter
- Dual access hatch at 12 & 6 o'clock
- 40mm outlet positioned to customers requirements

- *300mm - 7,500L & 10,000L
- **400mm - 10,200L & 15,000L

20,000L - 25,000L



View of tank configuration
20,000L - 25,000L

Features

- 100mm standard overflow
- 400mm basket filter
- Dual access hatch at 12 & 6 o'clock
- 40mm outlet positioned to customers requirements
- ADP self supporting roof design

Toroid Underground Water Tanks

Viscount Rotational Moulding also manufactures an award winning underground water tank, the Toroid. The Toroid underground water tanks are available as 3,000L 'donut' tanks and 5,000L 'bagel' tanks. The Toroid range provide a unique solution to underground water storage and water retention requirements for storm water - structurally strong, resistant to hydrostatic lift and easy to install.



Toroid 3,000L Donut



Toroid 5,000L Bagel



For a copy of VRM's Toroid underground water tank brochure please contact VRM direct or alternatively download a copy at www.viscountroto.com.au and follow the links.

Toroid Features:

Economical to install

The low profile reduces the required excavation depth.

Enables a safe working environment

Under Worksafe's Working at Depth Guidelines

Hassle free building site & traffic management

Can be installed anywhere on site in the preliminary stages.

Super Strong

Can be installed in trafficable areas, such as under driveways.

Reliable protection against hydrostatic lift

The patented compression ballast system has the entire ballast sitting on top of the tank as a dead weight, providing the most reliable protection against hydrostatic lift.

Flexible capacity

Can be coupled together in any combination to achieve greater capacities from 3,000L up.

Certifications



Viscount Rotational Mouldings' Tankmasta water tank range have been specifically designed to surpass the stringent requirements of the Australian Standard AS/NZS4766:2006.

www.viscountroto.com.au

VRM has re-launched www.viscountroto.com.au Log on today & check out VRM's full range.

Viscount Rotational Mouldings Pty Ltd shall not accept liability of any kind arising out of misuse of the product or use for any other purpose than its intended use as contained herein. All information supplied in this brochure was correct at time of printing. Viscount Rotational Mouldings Pty Ltd reserves the right to change specifications, colours and designs without further notice. Effective 31.07.2012. ©The patent and copyright are the property of Viscount Rotational Mouldings Pty. Ltd, and may not be reproduced without the written permission of Viscount Rotational Mouldings Pty. Ltd. Edition II

VISCOUNT Rotational Mouldings Pty Ltd warrants that its above ground tanks are free from defects caused by poor workmanship or faulty material & that its above ground tanks will be fit for the purpose for which they were designed, namely storing water, for a period of ten years from the date of purchase, subject to conditions. For a full copy of VISCOUNT Rotational Mouldings Pty Ltd warranty, please contact VRM directly.



Viscount Rotational Mouldings Pty Ltd

ABN: 19067462337

81 Frankston Gardens Drive

Carrum Downs, Victoria, 3201, Australia.

Tel: (03) 8770 3200

Fax: (03) 8770 3204

Sales Enquiries: 1800 775 000

Email: vrmsales@viscount.com.au

Web Viscount: www.viscountroto.com.au